

PHAROS

2x2 MIMO Sector Antenna

MODELS: TL-ANT2415MS /TL-ANT5819MS Datasheet

Highlights

- -High gain directional operation, wide coverage, ideal for Point to Multi-Point connections.
- -Easy Installation, seamlessly integrated with the Pharos Base Station
- -MIMO technology for higher throughput
- -Weatherproof design provides protection in harsh environments


Description

The Pharos Sector Antenna is a 2x2 MIMO Sector Antenna that is ideal for outdoor use when attached to a Pharos Base Station. These antennas, which feature high-gain directional transmission patterns, are excellent for building long distance Point-to-Multipoint coverage.



Scenarios/Topology

A TL-ANT5819MS or TL-ANT2415MS, installed with a Pharos Base Station, is ideal for supporting large area Point-to-Multipoint data transmission.

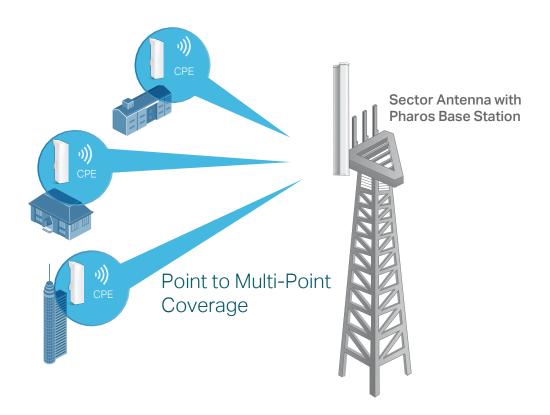

Easy Installation

Designed with a built-in mount, TP-LINK sector antennas (TL-ANT5819MS/TL-ANT2415MS) work seamlessly with Pharos Base Stations and no tools are required for installation.




Specifications

| | TL-ANT2415MS | |
|---------------------|-----------------------|--|
| Frequency Range | 2.3 - 2.7GHz | |
| Gain* | 15dBi | |
| VSWR | 1.8 Max | |
| HPOL Beamwidth | 120°(6dB) & 90°(3dB) | |
| VPOL Beamwidth | 120°(6dB) & 90°(3dB) | |
| Elevation Beamwidth | 8° | |
| Electrical Downtilt | 0° | |
| F/B Ratio | 25dB Min | |
| Impedance | 50Ω | |
| Interfaces | RP-SMA | |
| Polarization | Vertical & Horizontal | |
| Mounting | Pole Mount | |
| Survival Wind Speed | 241km/h | |
| Standards | RoHS, WEEE | |


^{*}Exclude Cable Loss

Radiation patterns


Horizontal Azimuth




Vertical Azimuth



Horizontal Elevation



Vertical Elevation




Specifications

| | TL-ANT5819MS |
|---------------------|-----------------------|
| Frequency Range | 5.0 - 6.0GHz |
| Gain* | 19dBi |
| VSWR | 1.8 Max |
| HPOL Beamwidth | 120°(6dB) & 90°(3dB) |
| VPOL Beamwidth | 120°(6dB) & 90°(3dB) |
| Elevation Beamwidth | 4° |
| Electrical Downtilt | 0° |
| F/B Ratio | 28dB Min |
| Impedance | 50Ω |
| Interfaces | RP-SMA |
| Polarization | Vertical & Horizontal |
| Mounting | Pole Mount |
| Survival Wind Speed | 241km/h |
| Standards | RoHS, WEEE |


^{*}Exclude Cable Loss

Radiation patterns


Horizontal Azimuth




Vertical Azimuth



Horizontal Elevation



Vertical Elevation



Ordering Information

Ideal to use with





Related Products



