

A 4-1



ADSS cables



**J Hook Clamp JHC**

**Field of use**

Suspension of Ø 10 to 20 mm ADSS cables at intermediate poles on short spans (up to 150 m).


Securing is achieved on Ø 14 or 16 mm pigtail hooks.

Installation on straight cable routes or with angles of max. 25°. In case of more severe angles protect the cable installing two anchoring clamps.



**Securing on pigtail hook**

**Dimensions**

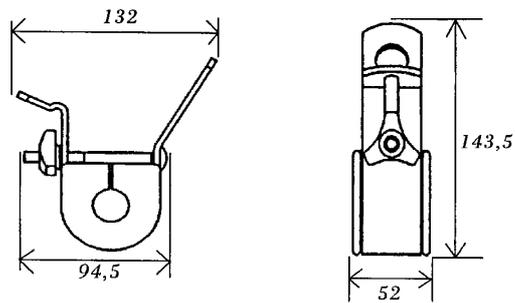

**Installation**

1. Hang the J hook suspension clamp to the pigtail hook (to be ordered separately).
2. Unscrew the wing nut and place the screw at the front of the J hook as shown.
3. Remove the rubber insert.
4. Place the ADSS cable in the rubber insert and put them back in the J hook suspension clamp.
5. Secure the rubber insert by hand tightening the wind nut.



**Characteristics**

Reference	Capacity	Material			Weight (kg)	Packaging
		Body (1)	Insert	Screw		
<b>JHC1015</b>	10 – 15 mm	Galvanised steel	UV protected neoprene	Protected steel	0.59	30 Units
<b>JHC1520</b>	15 – 20 mm				0.57	