


24 Fibre Swing Out Splicing and Patching Shelf

Prysmian Part Numbers: *See Table on page 3*

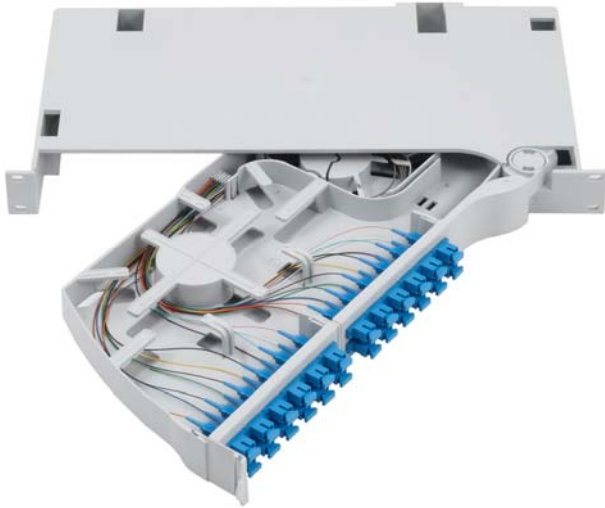

Picture shows shelf fitted with one FC panel and one SC panel

The OAsys 24 Fibre Swing Out Splicing and Patching Shelf is a plastic 1U shelf, that allows the connection of up to 24 fibres onto an adapter panel. The shelf is compatible with 19" and ETSI racks. Cables enter at the rear of the shelf on the left hand side and pigtails exit the unit from the front face. The shelf is supplied either empty, in kit format, or with the pigtails and adapters pre-installed.

Features and Benefits

- High density low cost compact design for up to 24 fibres.
- Compatible with SC, FC, E2000, LC, ST connector types.
- Cables anchor on the rear of the unit using a cable anchor plate supplied.
- Unit manufactured from high strength fire retardant plastic to give a light weight solution.
- Supplied either as an empty unit, in kit format (with pigtails and adapters in a bag) for installer loading, or with the pigtails and adapters pre-installed by Prysmian.
- All fibres are positively managed to a 30mm minimum bend radius.
- Compatible with blown fibre tubes (Ø5mm)
- Shelf pivots out to for access to the splice tray and pigtail area.
- Shelf can be used as a patch only solution and allows excess cable lengths to be stored.
- Stackable splice bay allows for easy upgrade of splicing capacity.
- The shelf offers the ability to terminate up to 2 cables and allows through splicing of fibres.
- Compatible with Sirocco blown fibre cables.

Kit Contents

The OAsys 24F swing out splicing and patching shelf is supplied with all of the necessary equipment to terminate a single cable. Note, splice protectors are not included.

The shelf can be supplied empty, in a kit format (with pigtails and adapters in a bag), or with the pigtails and adapters installed at Prysmian.

Additional Items -Required

- Splice Protectors

Additional Items - Optional

- ARS Cable Anchor
- Adapters (see data sheet AC002)
- Pigtails (see data sheet AC003)
- Patch cords (see data sheet AC004)
- Crimp splice bay
- 19" ETSI Brackets
- Upgrade Kit
- Cage Nut Kit

Technical Data

• Number of Splice Trays:	1
• Maximum Fibre Capacity:	24
• Maximum Cable Diameter (mm):	18
Required space envelope (mm):	(w) 481 x (d) 230 x (h) 44
• Operating temperature:	-20°C to + 50°C (5 to 95% RH)
• Material:	High Impact Polystyrene
• Colour	Light Grey RAL 7035
• Testing:-	
• Optical:	Tested 1310nm,1550nm and 1625nm
• Vibration:	IEC 60068-2-6: 1995
• Shock:	IEC 60068-2-27: 1987

Logistics

• Packing Dimensions (mm):	(w) 530 x (d) 330 x (h) 80
• Packed Weight (kg):	1.3
• Net weight (kg):	1.1

Part Numbers

Patch Panel Empty

Connector	Adaptor style	Colour	Prysmian Part Number
SC/LC DPX E2000	Simplex	Grey	XEXSC01364
SC DPX LC Quad	Duplex	Grey	XEXSC01365
FC/ST	Simplex	Grey	XEXSC01366
SC/LC DPX E2000	Simplex	Black	XEXSC01367
SC DPX LC Quad	Duplex	Black	XEXSC01368
FC/ST	Simplex	Black	XEXSC01369

Part Numbers

Patch panel with adaptors and pigtails
Supplied fully configured.

Kit Contents

These panels will be loaded with adaptors and pigtails to your specific requirements. They will be pre fitted in to the panel at our facility in Bishpstone.

Connector Type	Adaptor type	Fibre Count	Fibre type			
			Singlemode	MM 50/125 OM2	MM 62.5/125 OM1	MM 50/125 OM3
SC APC	Simplex	12	XEXSC01040	Contact Prysmian	Contact Prysmian	Contact Prysmian
		24	XEXSC01046	Contact Prysmian	Contact Prysmian	Contact Prysmian
SC UPC	Simplex	12	XEXSC01039	Contact Prysmian	Contact Prysmian	Contact Prysmian
		24	XEXSC01045	Contact Prysmian	Contact Prysmian	Contact Prysmian
SC APC	Duplex	12	XEXSC01117	Contact Prysmian	Contact Prysmian	Contact Prysmian
		24	XEXSC01121	Contact Prysmian	Contact Prysmian	Contact Prysmian
SC UPC	Duplex	12	XEXSC01116	XEXSC01150	XEXSC01152	XEXSC01154
		24	XEXSC01020	XEXSC01151	XEXSC01153	XEXSC01155
LC APC	Duplex	24	XEXSC01044	Contact Prysmian	Contact Prysmian	Contact Prysmian
		48	XEXSC01050	Contact Prysmian	Contact Prysmian	Contact Prysmian
LC UPC	Duplex	24	XEXSC01043	XEXSC01178	XEXSC01180	XEXSC01182
		48	XEXSC01049	XEXSC01179	XEXSC01181	XEXSC01183
LC APC	Quad	24	XEXSC01119	Contact Prysmian	Contact Prysmian	Contact Prysmian
		48	XEXSC01123	Contact Prysmian	Contact Prysmian	Contact Prysmian
LC UPC	Quad	24	XEXSC01118	Contact Prysmian	Contact Prysmian	Contact Prysmian
		48	XEXSC01122	Contact Prysmian	Contact Prysmian	Contact Prysmian
FC APC	Simplex	12	XEXSC01042	Contact Prysmian	Contact Prysmian	Contact Prysmian
		24	XEXSC00148	Contact Prysmian	Contact Prysmian	Contact Prysmian
FC UPC	Simplex	12	XEXSC01041	Contact Prysmian	Contact Prysmian	Contact Prysmian
		24	XEXSC01047	Contact Prysmian	Contact Prysmian	Contact Prysmian
ST	Simplex	12	Contact Prysmian	XEXSC01166	XEXSC01168	XEXSC01170
		24	Contact Prysmian	XEXSC01167	XEXSC01169	XEXSC01171

Part Numbers

Patch panel with adaptors and pigtails Supplied as a Kit

Kit Contents

These panels will be supplied with the panel, adaptors and pigtails as separate items for you to install.

Connector Type	Adaptor type	Fibre Count	Pigtail type			
			Singlemode	MM 50/125 OM2	MM 62.5/125 OM1	MM 50/125 OM3
SC APC	Simplex	12	XEXSC01028	Contact Prysmian	Contact Prysmian	Contact Prysmian
		24	XEXSC01034	Contact Prysmian	Contact Prysmian	Contact Prysmian
SC UPC	Simplex	12	XEXSC01027	Contact Prysmian	Contact Prysmian	Contact Prysmian
		24	XEXSC01033	Contact Prysmian	Contact Prysmian	Contact Prysmian
SC APC	Duplex	12	XEXSC01109	Contact Prysmian	Contact Prysmian	Contact Prysmian
		24	XEXSC01113	Contact Prysmian	Contact Prysmian	Contact Prysmian
SC UPC	Duplex	12	XEXSC01108	XEXSC01156	XEXSC01158	XEXSC01160
		24	XEXSC01112	XEXSC01157	XEXSC01159	XEXSC01161
LC APC	Duplex	24	XEXSC01032	Contact Prysmian	Contact Prysmian	Contact Prysmian
		48	XEXSC01038	Contact Prysmian	Contact Prysmian	Contact Prysmian
LC UPC	Duplex	24	XEXSC01031	XEXSC01184	XEXSC01186	XEXSC01188
		48	XEXSC01037	XEXSC01185	XEXSC01187	XEXSC01189
LC APC	Quad	24	XEXSC01111	Contact Prysmian	Contact Prysmian	Contact Prysmian
		48	XEXSC01115	Contact Prysmian	Contact Prysmian	Contact Prysmian
LC UPC	Quad	24	XEXSC01110	Contact Prysmian	Contact Prysmian	Contact Prysmian
		48	XEXSC01114	Contact Prysmian	Contact Prysmian	Contact Prysmian
FC APC	Simplex	12	XEXSC01030	Contact Prysmian	Contact Prysmian	Contact Prysmian
		24	XEXSC01036	Contact Prysmian	Contact Prysmian	Contact Prysmian
FC UPC	Simplex	12	XEXSC01029	Contact Prysmian	Contact Prysmian	Contact Prysmian
		24	XEXSC01035	Contact Prysmian	Contact Prysmian	Contact Prysmian
ST	Simplex	12	Contact Prysmian	XEXSC01172	XEXSC01174	XEXSC01176
		24	Contact Prysmian	XEXSC01173	XEXSC01175	XEXSC01177

Additional Items - Required

Splice Protectors

OAsys splice protectors are used to protect the fibre splice. They are 2.2mm in diameter and 45mm in length.




*Prysmian Part No. - XPESC00053 (pack of 50)
- XKTSC00050 (pack of 12)*

Additional Items - Optional

ARS Cable Anchor


The OAsys ARS Cable Clamp is used to anchor a single cable and to distribute up to 4 cable elements. The ARS is suitable for cables between 12 and 48 fibres. 1.5 metres of routing tube is supplied with the ARS. The ARS allows for the anchoring / termination of both the cable strength member and any Aramid within the cable construction.



Prysmian Part No. - XEXSC01129

Pack of 10 Crimp Splice Protector Bay


The OAsys Crimp Splice Protector Bay is used to hold up to twelve crimp splice protectors. The splice bays can be stacked two high on the 24 Fibre Swing Our Splicing and Patching shelf to hold a total of twenty four crimp splice protectors.

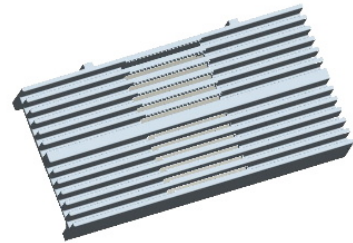

Prysmian Part No. - XKTSC00165

19" to ETSI conversion brackets

The 19" to ETSI conversion brackets are easy to install to make the 19" panel fit an ETSI Rack.



*Prysmian Part No. - XKTSC00171 Grey
- XKTSC00172 Black*

Additional Items - Optional

Upgrade Kit

The upgrade kits will be for pre configured shelf's that have only been half populated or you require a change of connector style. These kits will consist of an adaptor panel which can be either SC simplex, SC Duplex or FC. We will supply the pigtails and adaptors that you have specified all loose for you to configure. The SC and FC variants will come with 12 x adaptors and pigtails. The LC variants will come with 24 pigtails and either 6 x Quad adaptors and 12 x duplex adaptors to create the 24 ports.



Adaptor panel	Colour	Fibre type			
		Singlemode	OM1	OM2	OM3
SC/UPC SPX	Grey	XKTSC00173	XKTSC00183	XKTSC00184	XKTSC00185
SC/UPC SPX	Black	XKTSC00198	XKTSC00208	XKTSC00209	XKTSC00210
SC/APC SPX	Grey	XKTSC00174	Contact Prysmian	Contact Prysmian	Contact Prysmian
SC/APC SPX	Black	XKTSC00199	Contact Prysmian	Contact Prysmian	Contact Prysmian
SC/UPC DPX	Grey	XKTSC00175	XKTSC00186	XKTSC00187	XKTSC00188
SC/UPC DPX	Black	XKTSC00200	XKTSC00211	XKTSC00212	XKTSC00213
SC/APC DPX	Grey	XKTSC00176	Contact Prysmian	Contact Prysmian	Contact Prysmian
SC/APC DPX	Black	XKTSC00201	Contact Prysmian	Contact Prysmian	Contact Prysmian
FC/UPC	Grey	XKTSC00177	XKTSC00189	XKTSC00190	XKTSC00191
FC/UPC	Black	XKTSC00202	XKTSC00214	XKTSC00215	XKTSC00216
FC/APC	Grey	XKTSC00178	Contact Prysmian	Contact Prysmian	Contact Prysmian
FC/APC	Black	XKTSC00203	Contact Prysmian	Contact Prysmian	Contact Prysmian
LC/UPC DPX	Grey	XKTSC00179	XKTSC00192	XKTSC00193	XKTSC00194
LC/UPC DPX	Black	XKTSC00204	XKTSC00217	XKTSC00218	XKTSC00219
LC/APC DPX	Grey	XKTSC00180	Contact Prysmian	Contact Prysmian	Contact Prysmian
LC/APC DPX	Black	XKTSC00205	Contact Prysmian	Contact Prysmian	Contact Prysmian
LC/UPC QUAD	Grey	XKTSC00181	XKTSC00195	XKTSC00196	XKTSC00197
LC/UPC QUAD	Black	XKTSC00206	XKTSC00220	XKTSC00221	XKTSC00222
LC/APC QUAD	Grey	XKTSC00182	Contact Prysmian	Contact Prysmian	Contact Prysmian
LC/APC QUAD	Black	XKTSC00207	Contact Prysmian	Contact Prysmian	Contact Prysmian
ST	Grey	XKTSC00223	XKTSC00225	XKTSC00226	XKTSC00227
ST	Black	XKTSC00224	XKTSC00228	XKTSC00229	XKTSC00230

Cage Nut Kit

The Cage nut kit will consist of 4 x cage nuts and 4 x cage nut screws to allow mounting the panel in a 19" Rack

Prysmian Part No. – XKTSC01129



Prysmian Telecom Cables & Systems UK Ltd, Chickenhall Lane, Bishopstoke, Hants SO50 6YU, UK

Technical Enquiries +44 (0) 2380 608760 Fax Number +44 (0) 2380 608769

© PRYSMIAN 2007. All Rights Reserved.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian. The information is believed correct at the time of issue. Prysmian reserves the right to amend this specification without notice. This specification is not contractually valid unless specifically authorised by Prysmian.

Issue 06, November 2007

Ref: RM012