



Bundle DuraMulti DB 7x14/10 mm

Bundle of microducts DuraMulti DB is intended for protection of optical microcables. Microducts DuraMicro DB are oversheathed by foil from high density polyethylene (HDPE). Access to microducts is easy because of thin sheath, which is not attached to microducts.



Wall thickness of microducts, bundle sheath and type of material classify the bundle as a Direct Burial (DB). Installation methods and conditions are described in the Installation manual.

The quality management system of Dura-Line CT is certified acc. to EN ISO 9001. Bundle does not contain dangerous chemicals in accordance to the Directive 2006/1907/EC (REACH). Bundle meets requirements of the Directive 2002/95/EC (RoHS) - content of lead, cadmium, mercury, Cr^{VI}, PBB and PBDE.


Parameters of microducts are in relevant Technical Data Sheet and in company standard CWS103-02.

| Parameter | Value |
|--|---------------------|
| Maximal dimension of cross section (MAX) | *43,5 mm |
| Minimal dimension of cross section (MIN) | *40 mm |
| Sheath thickness | *0,75 mm |
| Weight | *615 kg/km |
| Transport and storage temperatures | from -40°C to +70°C |
| Installation temperatures | from -10°C to +50°C |
| Operating temperatures | from -40°C to +70°C |
| Installation tensile force | max. 7 070 N |
| Minimum bending radius | 435 mm |
| Outdoor exposure limit in Central Europe | max. 12 months |

* informative value

- **Standard** is a basic material version convenient for most applications.
- **UV stabilized** is more resistant to ultraviolet radiation. Storability is prolonged to 24 months at Central Europe outdoor conditions. Microducts and sheath are stabilized.
- **Antistat** - lower electrical surface resistance. Microducts and sheath are antistatic.

Bundle is supplied in natural translucent version or in a wide scale of the following RAL list.

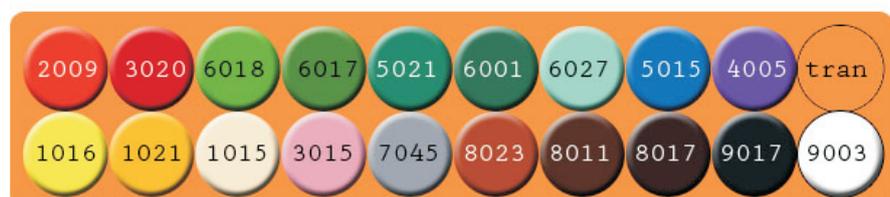

DESCRIPTION, APPLICATION

LEGISLATION

PARAMETERS

MODIFICATION

COLOR LIST

Bundle DuraMulti DB 7x14/10 mm

MARKING

Bundle is printed in whole length according to customer requirement. Printing color is contrasting to bundle color. Printing can be doubled in opposite sides as an option. Printing scheme is repeating after 1 metre.

Example of printing scheme:

DURA-LINE CT DuraMulti DB 7x14/10 mm SILICORE 03/2009 LOT No 12345678 0000 m >|<

PACKING AND STORAGE

Bundle is wound on return wooden drum (DB1) and coil is wrapped by stretch film. Bundle's ends are protected by plastic caps protecting them from impurities penetrating into microducts. DB1 core diameter is 950 mm. All drum dimensions are informative values.

| Drum | Flange diameter (mm) | Drum width (mm) | Shaft hole diameter (mm) | Winding maximum length (m) | Informative weight of full drum (kg) |
|------|----------------------|-----------------|--------------------------|----------------------------|--------------------------------------|
| DB1 | 2 250 | 1 100 | 82 | 1 300 | 1 200 |

DB1

