

16-Port 10/100Mbps Fast Ethernet Switch TL-SF1016DS



Expands your network,
adding more devices
and computers to the network

No configuration required,
just connects it to your network

Delivers up to 200Mbps
throughput in full-duplex mode



Description:


TL-SF1016DS 16-Port 10/100M Fast Ethernet Switch provides 16 10/100Mbps Auto-Negotiation RJ45 ports. Each port of the TL-SF1016DS supports Auto MDI/MDIX function, eliminating the need for crossover cables or uplink ports. The Switch is Plug-and-Play and any port can be simply plugged into a server, a hub, a switch, a router, and so on, to expand your network.

TP-LINK TL-SF1016DS provides you with a low-cost, easy-to-use, high-performance, seamless and standard upgrade to improve your old network to a 100Mbps network. It will boost your network performance up to full duplex data transfer.

Specifications:

Standards	IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX
Protocol	CSMA/CD
Ports	16 10/100Mbps Auto-Negotiation RJ45
Network Media (Cable)	10Base-T: UTP category 3, 4, 5 cable (maximum 100m) EIA/TIA-568 100Ω STP (maximum 100m) 100Base-Tx: UTP category 5, 5e cable (maximum 100m) EIA/TIA-568 100Ω STP (maximum 100m)
Switching Capacity	3.2Gbps
MAC Address Table	8K
Data Transfer Rate	Ethernet: 10Mbps (Half Duplex), 20Mbps (Full Duplex) Fast Ethernet: 100Mbps (Half Duplex), 200Mbps (Full Duplex)
LED indicators	Power, Link/Act, 100Mbps
Support	Green Technology
Transfer Method	Store-and-Forward
MAC Address Learning	Automatically learning, automatically update
Frame Filtering and Forward Rate	10Mbps: 14880pps 100Mbps: 148800pps
Power Supply	100-240V~ 50-60Hz (Internal universal power supply)
Safety & Emission	CE, FCC
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
Storage Temperature	-40°C ~ 70°C (-40°F ~ 158°F)
Operating Humidity	10% ~ 90% RH non-condensing
Storage Humidity	5% ~ 90% RH non-condensing
Dimensions(L x W x H)	11.6x7.1x1.7 in. (294mmx180mmx44 mm)

Diagram:

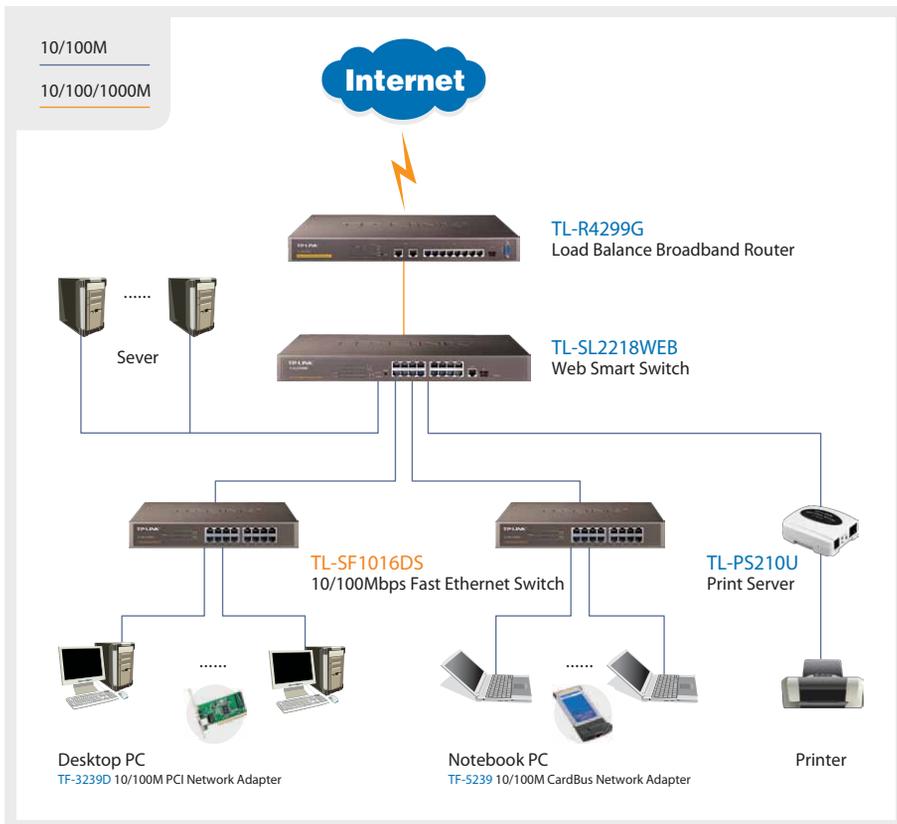

Features:

- Complies with IEEE 802.3, IEEE 802.3u standards
- 16 10/100Mbps Auto-Negotiation RJ45 ports supporting Auto-MDI/MDIX
- Supports IEEE 802.3x flow control for Full Duplex mode and backpressure for half-duplex mode
- Supports MAC address auto-learning and auto-aging
- LED indicators for monitoring power, link, activity, 100Mbps
- Rack-mountable steel case
- Internal universal power supply
- Innovative energy-efficient technology saves power up to 25%

Package:

- TP-LINK TL-SF1016DS Switch
- Power cord
- User Guide
- Mounting screws and other things

Related Products:

- TL-R480T SMB Broadband Router
- TL-R4299G Load Balance Broadband Router
- TL-SL3428 24+4G Gigabit-Uplink Managed Switch
- TL-SL2218WEB 24+2G Gigabit-Uplink Web Smart Switch
- TL-SL1226 24+2G Unmanaged Gigabit-Uplink Switch
- TL-PS210U Single USB2.0 Port MFP Print Server
- TG-3269D Gigabit PCI Network Adapter
- TG-5269 Gigabit CardBus Network Adapter

Specifications are subject to change without notice. TP-LINK is a registered trademark of TP-LINK Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. No part of the specifications may be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from TP-LINK Technologies Co., Ltd.